

# Energy & PECM




## ***Critical energy infrastructure is increasingly defined by its invisible geometries....***

*...Such as the thermal microchannels within critical heat exchangers and the thin-walled geometries on nickel superalloy turbine blades and vanes. As propulsion systems and airframes are pushed toward higher efficiency, temperatures, and safety margins, performance is dictated by internal surfaces and features.... Many of which are difficult to machine or inspect.*



1


PECM is ideal for **turbine blade and vane components** where internal surface quality, feature consistency, and defect avoidance are critical.



2


PECM's capabilities are adept for **thermal infrastructure** in turbomachinery that relies on internal channels, microfeatures, or thin-walled geometries to manage heat efficiently.

 520 Hinton Pond Road, STE 128,  
Knightdale, NC 27545

 984-464-0701

 [info@voxelinnovations.com](mailto:info@voxelinnovations.com)

 [www.voxelinnovations.com](http://www.voxelinnovations.com)

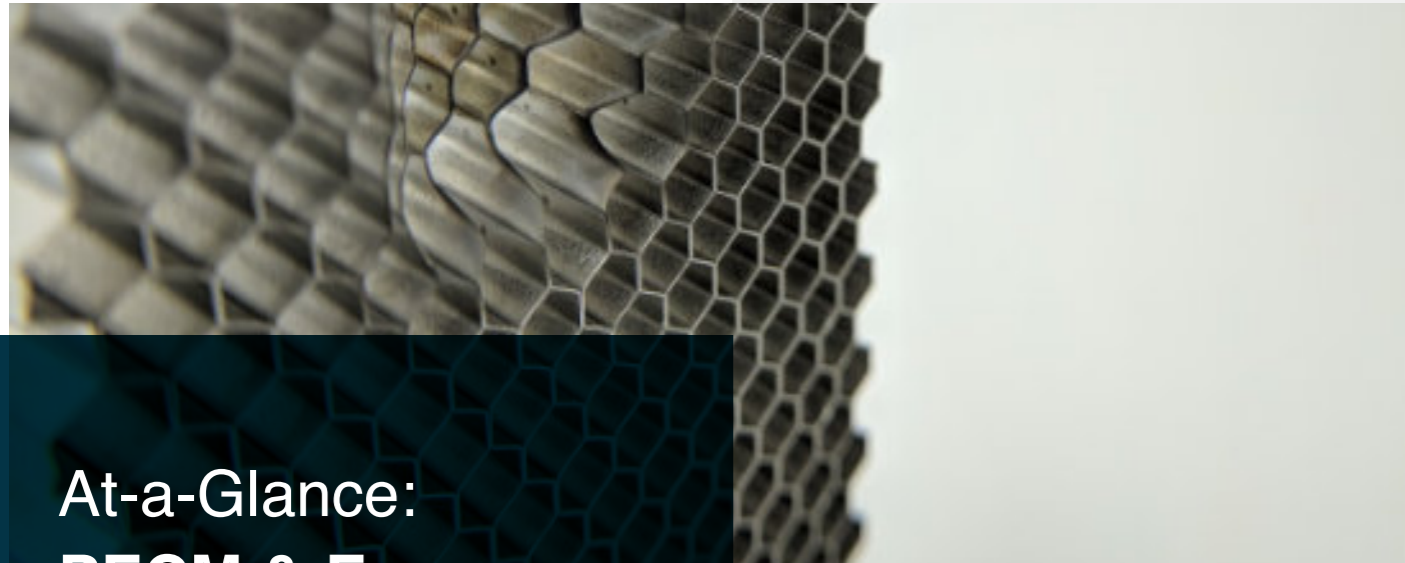

## At-a-Glance: PECM & Energy Features

PECM delivers consistent, unique value for critical energy infrastructure.


Maintaining consistent channel geometry, ultra-smooth surfaces, and predictable flow behavior across tens of thousands of power-generation and energy-infrastructure components requires a process that **eliminates thermal distortion, taper, and geometry drift** across production runs.

**Voxel's PECM can act as a unique remedy for these energy-sector challenges.**


PECM removes metal atom-by-atom, generating uniform internal surfaces and channel architectures in **nickel-based superalloys, stainless steels, titanium**, and other conductive materials used throughout gas turbines, hydrogen infrastructure, and advanced heat-exchange applications, at-scale.

### PECM enables:

- **Micron-level channel uniformity** without taper, burrs or HAZ
- **<.2µm Ra internal surface finishes** on stainless, copper and nickel alloys
- **Repeatable multi-channel arrays** for thermal flow paths
- **Minimal tool wear**, supporting consistency across production

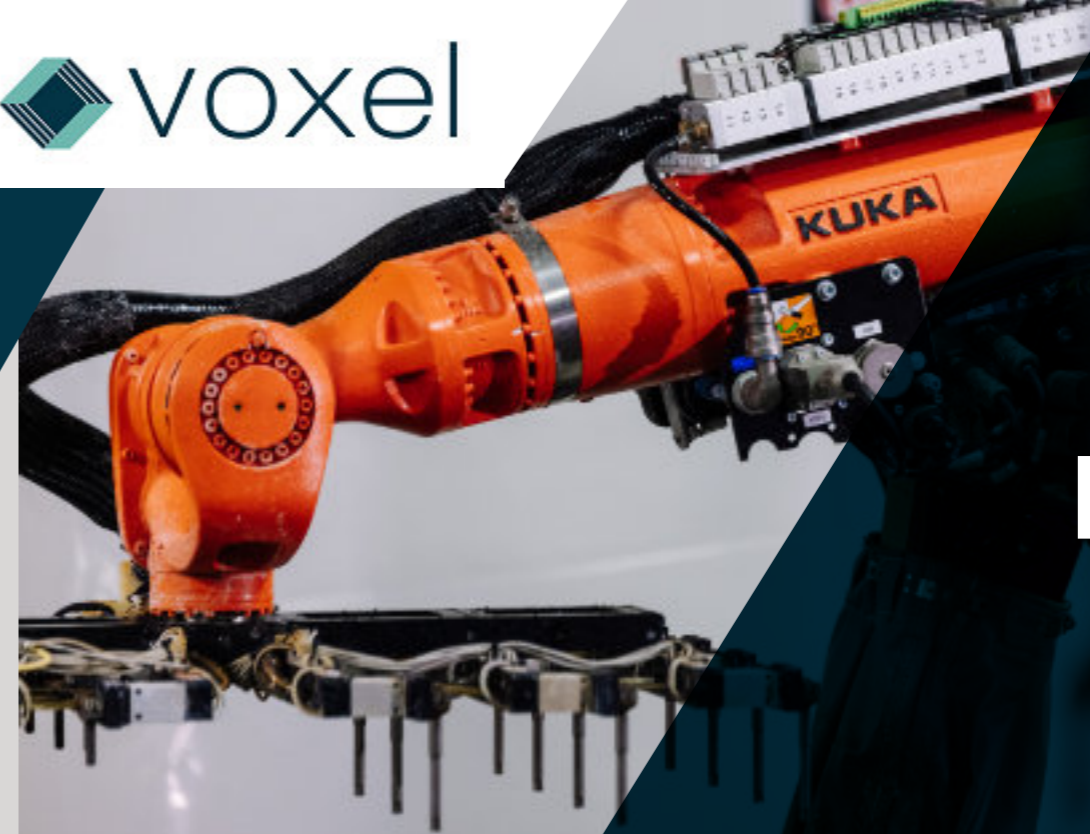

# PECM BASICS

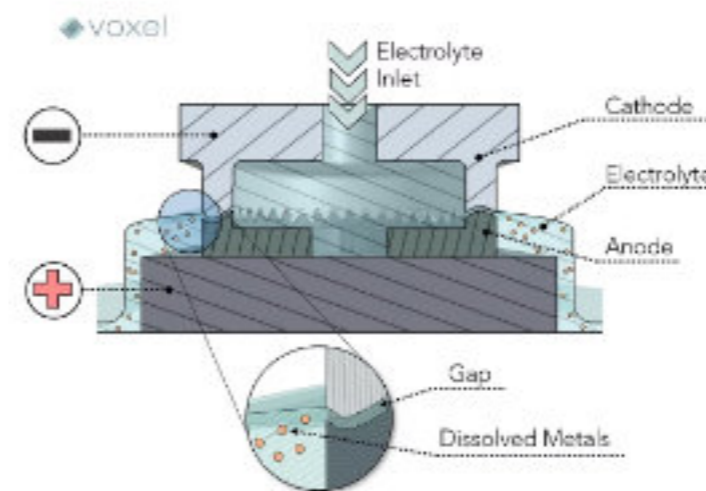

Unlike other material removal technologies such as electrical discharge machining (EDM), PECM is based on the principles of electrolysis. The machining operation involves a tool (the cathode) in the inverse shape of the desired workpiece (the anode).

As the tool moves towards the workpiece surface, it machines the workpiece into the complementary shape of the tool. This occurs as a pulsed DC current is applied, allowing for high precision and superior

surface quality. At the same time, an electrolyte is pumped between the cathode and anode at high speed, removing dissolved metal and heat.

The result is an operation capable of producing a burr-free 3D shape with minimal tool wear in alloys that are difficult or impossible to machine through traditional methods. As PECM can produce parts in parallel with excellent repeatability, it is well-suited to high-volume and/or high-value production.

The PECM process has **4** factors:



- The **cathode**, or tool
- The **anode**, or workpiece
- The **electrolytic fluid**, and
- **The pulsed voltage**



## Material Compatibility

PECM machines most conductive materials, including but not limited to:

- |               |              |               |                |
|---------------|--------------|---------------|----------------|
| 4140          | Copper       | M4 Tool Steel | Stainless 17-4 |
| A2 Tool Steel | Ferrium C64  | MarM247       | Stainless 304  |
| Al MMCs       | GaSb         | Molybdenum    | Stainless 316  |
| Aluminum 6061 | Germanium    | MP35N         | Stainless 440C |
| Aluminum 7075 | Haynes 230   | NdFeB         | Ti Grade 2     |
| AMZ4          | Inconel 625  | Nickel        | Ti64           |
| Brass         | Inconel 718  | Nitinol       | TiAl           |
| Bronze        | Inconel 738  | Nitronic 60   | Vit105         |
| CMSX-4        | Inconel 740h | Pyrowear 53   |                |
| Cobalt Chrome | InSb         | Rene N-5      |                |

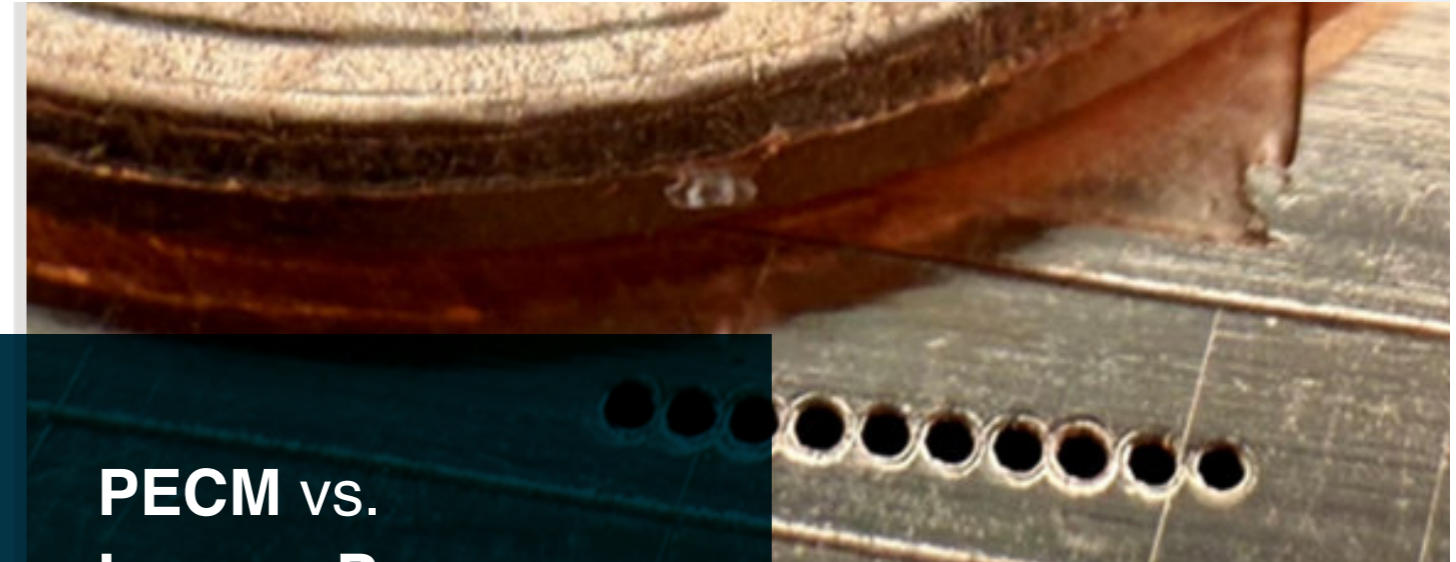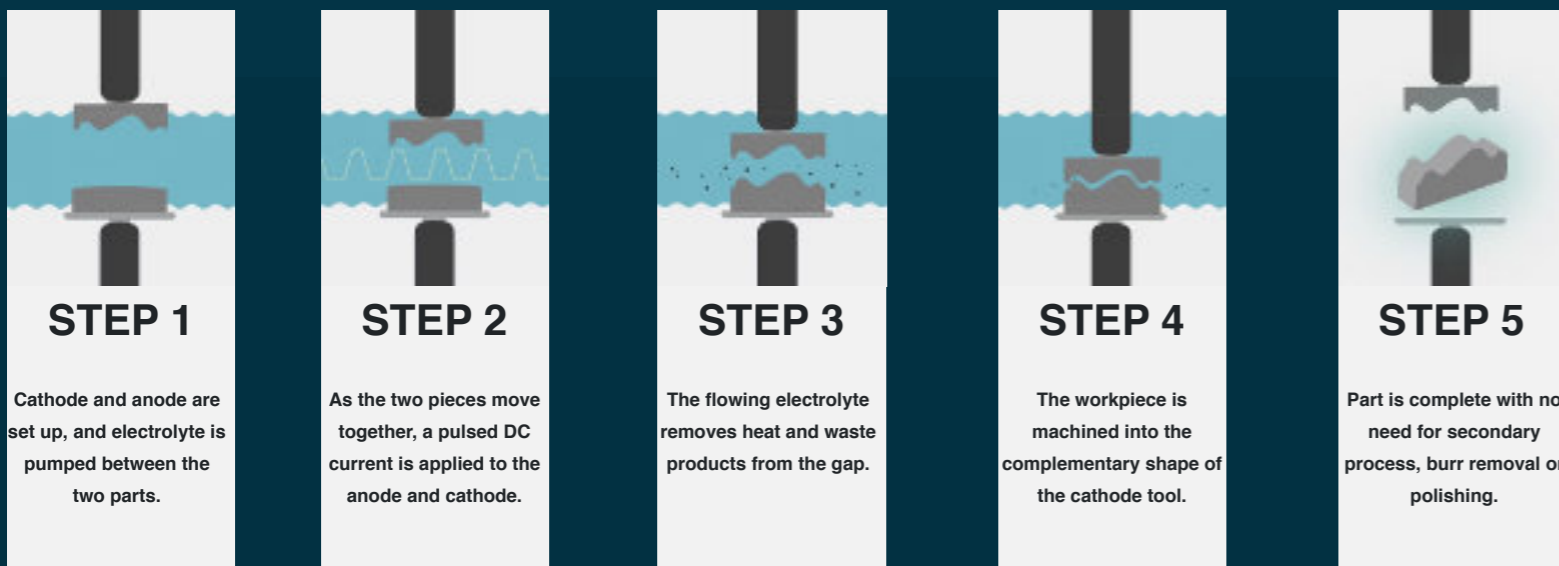

## PECM vs. Legacy Processes

Design agency is limited by heat and/or contact-based material removal processes.

### Conventional processes have inherent limitations, including...

- Burrs & Tool Vibration**  
 Contact-based machining introduces cutting forces that create **burrs**, **edge rollover**, and **vibration-driven surface damage**, notably on thin features and tight internal geometries.
- Heat-affected Zones / Recast Layers**  
 Thermal processes leave **HAZ**, **microcracks**, or **recast layers** that alter material properties, reducing fatigue or corrosion resistance.
- Limited Repeatability**  
 Repeatability degrades as tools wear and get replaced. **Dimensional drift**, **inconsistent finishes**, and **increased inspection** affect high-volume production.

**Manufacturers are forced to compromise new designs to meet these limitations.**

### WHY CHOOSE PECM?

The unique properties of Voxel's pulsed electrochemical machining technology allow it to avoid many of the aforementioned issues:

- Non-contact machining produces **no burrs** or **tool vibration**, allowing machining of sensitive areas
- Non-thermal machining leaves **no HAZ** or **recast layers**, leaving **superfinished surfaces**
- PECM allows **part-to-part/ feature-to-feature repeatability**, significantly less tool wear

### PECM IS FUNDAMENTALLY DIFFERENT

By utilizing electrochemistry instead of contact or heat, PECM removes material atom-by-atom, allowing smoother surface finishes, higher tolerances and improved repeatability—enabling manufacturers to explore new designs into production.



## Process Specs

### ✓ Cut Surface Area

3500-7000mm<sup>2</sup> in slower cuts; 1750-3500 in faster cuts. Larger surfaces may require multiple operations or higher-amperage equipment while smaller surfaces can potentially be run in-parallel

### ✓ Wall Thickness

Less than 50 $\mu$ m, with no maximum. .075mm (.003in) has been achieved in 2D blind or through features, minimum feature size is a wall of <25 $\mu$ m

### ✓ Slot Channel

- Top: 50 $\mu$ m (.002in) minimum
- Bottom: 20 $\mu$ m (.0008in) minimum
- Slot: 30 to 50 $\mu$ m
- Internal: 150 $\mu$ m (.006) minimum is most common, although 75 $\mu$ m (.003in) has been achieved in an ideal case

### ✓ Surface Finish

.005 $\mu$ m Ra to .4 $\mu$ m Ra, depending on the material

### ✓ Durability

Cathodes will have a lifetime exceeding thousands of parts

### ✓ Aspect Ratio

No minimum, capable of exceeding 300:1, depending on the feature size and electrode fabrication method

### ✓ Corners & Radii

- Top: 50 $\mu$ m (.002in) minimum; Bottom: 20 $\mu$ m (.0008in) minimum
- Minimum inside 90 corner radius, pocket bottom: 15-25 $\mu$ m possible; 25-50 $\mu$ m is more typical
- Minimum outside 90 corner radius, pocket top: 50 $\mu$ m standard
- Internal: 150 $\mu$ m (.006) minimum is most common, although 75 $\mu$ m (.003in) has been achieved in an ideal case

### ✓ Process Speed

Tends to be a step change in speed with geometry size, depending on the ability to flow electrolyte through the part's features. Minimum blind feature (e.g. a slot): .5mm, speeds of .1-2 $\mu$ m/s  
Feature of 2+mm: speeds of 15-30+  $\mu$ m/s  
More NRE yields more opportunity to improve speeds

### ✓ Depth Tolerance

Depends on parallelism of the workpiece. Generally, the depth can be controlled to +/- 5 $\mu$ m or less

Power generation and energy infrastructure are under mounting pressure to decarbonize while still delivering reliable, dispatchable power at scale. National energy strategies, grid modernization initiatives, and industrial decarbonization targets increasingly emphasize long-term emissions reductions, with renewable integration, hydrogen deployment, and efficiency improvements all playing central roles in near- and mid-term progress [1].

Yet even as renewable penetration increases and alternative fuels gain traction, thermal efficiency in gas turbines and advanced energy systems remains a dominant lever. Efficiency directly affects fuel consumption, operating cost, plant output, and lifecycle emissions, thereby affecting the physics and manufacturability of high-efficiency turbines and heat-exchange systems—critical from both an economic and environmental perspective.

In commercial energy, these pressures and

aspirations collide with a manufacturing-driven reality that can be particularly unforgiving. Unlike many industrial sectors, energy components must meet stringent certification, reliability, and lifecycle requirements while operating in environments defined by extreme temperatures, cyclic loading, and long service intervals. Small deviations in material condition, surface quality, or internal geometry can develop consequences over thousands of cycles. This means manufacturing variability is not merely a cost issue, but a performance and safety concern that shapes what designs are considered viable in the first place.

At the same time, the supply chain is being asked to deliver increasingly complex components at higher production rates without sacrificing repeatability. Advanced engines and thermal systems rely on internal features that are difficult to machine, difficult to inspect, and often

impossible to rework once a part is complete. **As designs push toward tighter tolerances, thinner walls, and more aggressive internal architectures, manufacturers must balance innovation against risk;** particularly when the features that govern performance are hidden from view and embedded deep within energy-critical hardware.

### Problem 1: Thermal Efficiency vs. Temperature Limits

For instance, within modern industrial gas turbines, efficiency gains aren't found in software, rather, they are rooted in thermodynamics and hardware: increasing overall pressure ratio and turbine inlet temperature (TIT) remains one of the most powerful pathways to higher thermal efficiency [2].

However, this progress comes with a familiar tax: higher temperatures upstream and deeper in the hot section drive an escalating need for **improved cooling flows and more aggressive high-**

**temperature materials,** as blades and vanes must survive extreme environments for thousands of cycles without losing integrity [2, 3].

**Fundamentally, this is where energy-critical parts become increasingly defined by their invisible geometries.**

The performance and durability of turbine blades and vanes are governed not only by external aerodynamics, but by internal cooling passages, micro-scale turbulators (such as ribs, pin fins, dimples, etc.) and carefully shaped film-cooling holes that meter air and form protective cooling films across hot surfaces. [4, 5, 6]

Seemingly insignificant changes in internal channel design tangibly affect heat transfer, temperature gradients, and the mass flow of cooling air required, thereby directly influencing engine efficiency and component life [6,7].

The same is true externally: film-cooling hole geometry and surface condition can be sensitive to roughness, partial blockage, and manufacturing variability, meaning the real-

world result deviates substantially from what design engineers originally intended. [8]

Meanwhile, the materials keep getting tougher. Nickel-based superalloys remain foundational because they retain mechanical strength at temperatures that would cripple conventional alloys, enabling continued efficiency increases through hotter, harder-running cores [13–14]. At the same time, metal matrix composites (MMCs) are being deployed in commercial hot-section components, illustrating the industry's push to extend temperature capability and reduce cooling penalties [15–16].

But whether the material is a nickel-based superalloy or an MMC, the burden still falls on controllable internal features and surface conditions: cooling effectiveness, flow losses, and local hot spots are governed by the geometry and finish of internal passages and holes, and **those are manufacturing problems as much as they are design problems** [11–12, 17–18].


### Problem 2: Manufacturing Constraints & Design Conservatism

Conventional manufacturing comes with tradeoffs that intensify as geometries shrink and requirements tighten. Some processes scale quickly (such as laser-based processes) but introduce thermal side effects or surface damage that may demand secondary operations; other methods (such as CNC) offer precision but tend to struggle with deep, high-aspect-ratio internal features or consistent feature-to-feature repeatability. Designers and manufacturers often respond rationally: they back away from aggressive cooling architectures or ultra-tight internal features when variability and inspection risk rise, especially when the part's performance is governed by surfaces and passages that are difficult to measure directly [19–20].

AM is a band-aid; it can create complex manifolds and internal channels needed for thermal designs, but **overwhelmingly**

Manufacturing-Induced Surface Degradation and Its Impact on Turbomachinery Performance

	CNC / Micro-Machining	EDM / Laser	Additive Manufacturing	PECM
Heat-Affected Zones / Recast Layers	Low	High	High	Low
Surface Roughness Variability	Medium	Medium	High	Low
Micro-burrs & Edge Deformation	Medium	Low	Medium	Low
Feature-to-Feature Dimensional Drift	Medium	Medium	High	Low
Postprocessing Access Limitations (Internal Features)	High	Medium	High	Low
Impact on Cooling Effectiveness & Pressure Loss	Medium	High	High	Low
Impact on Component Durability & Fatigue Life	Medium	High	High	Low

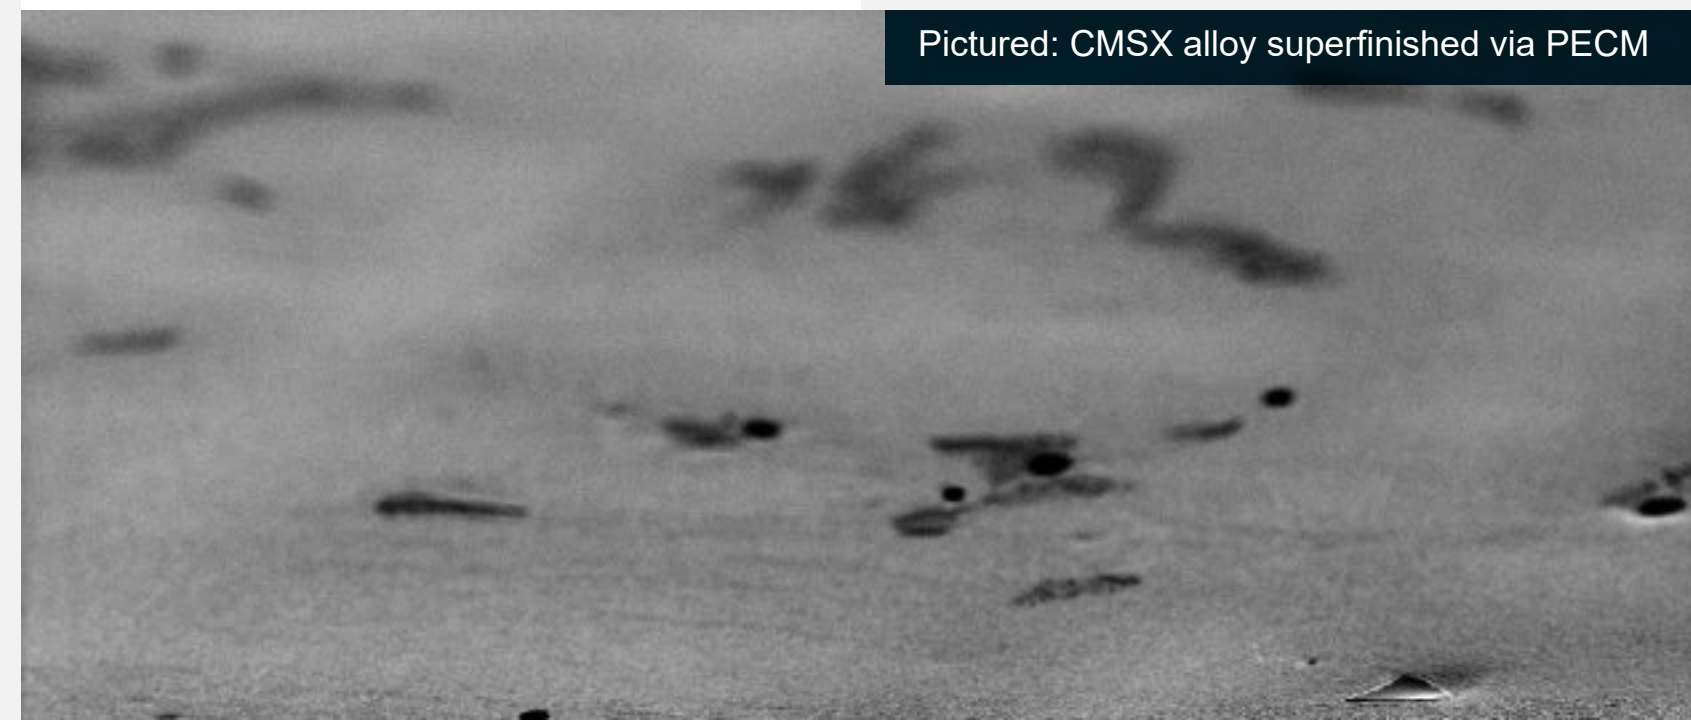

Pictured: CMSX alloy superfinished via PECM

**struggles to produce adequate surface quality**— as-built roughnesses amongst more advanced methods can still yield 10–20  $\mu\text{m}$  surfaces. Additionally, as AM scales to meet higher volumes, **manufacturers may sacrifice laser scanning strategies, powder sizes, and layer thicknesses to make parts quicker with inferior tolerances** [21].

As efficiency targets continue to rise, manufacturers will feel growing pains such as temperature limits, cooling penalties, yield risk, and verification challenges. Largely, these limitations come from hardware and infrastructure: engine architectures are being pushed toward higher pressure ratios and higher firing temperatures, while simultaneously acknowledging cooling air availability and component durability as major constraints [4–7].

Geometry and scale are at the heart of these growing pains: when internal surfaces and microfeatures directly govern performance, manufacturers often respond by backing away from aggressive new geometries, as the risk of variability is increased at scale. This shows up as larger safety margins, lower cooling feature densities, thicker walls, and more forgiving tolerances, ultimately resulting in a widening gap between what **can** be designed and what **does** get

designed.

This “**design conservatism**” is especially true in turbine cooling hardware where internal passages, ribs, pin fins, and film-cooling holes push into sub-millimeter scales, and where small amounts of roughness or contamination can cause flow instability, hot spots, or accelerated damage [9–12].

However, the market continues to demand efficiency improvements, and the conventional high-throughput processes manufacturers rely on increasingly introduce structural side effects. While postprocessing can mitigate some issues, these methods struggle to uniformly reach deep internal microfeatures without altering geometry. Ultimately, that combination (tight internal features and hard-to-verify surfaces) increases the likelihood of throttling performance, durability drift, or shortened service life when engines are run continuously at high utilisation [19–21].

That is why modern energy systems increasingly reward manufacturing processes that can deliver internal microfeatures and surface integrity at scale, particularly in turbine hardware and thermal systems where performance, efficiency, and durability are governed by invisible geometry [22–23]. ■

Pictured: Cross-section of additive S-shaped component machined internally via PECM



# Working With Voxel

**Voxel is a uniquely specialized contract manufacturer deploying critical parts in production environments via PECM with applied R&D.**

## ☑ **Driven by Co-Development**

Voxel embeds with our customers throughout the product lifecycle, creating value through **IP, licensing, and production contracts**.

## ☑ **Unique Capabilities**


Our applied R&D enables machining of challenging **features, materials, and surface conditions** impractical or impossible with legacy processes.

## ☑ **Production-Ready Success**

Voxel's PECM-based processes are engineered for **repeatability and parallelization**, supporting the transition from early development to reliable, high-volume production with minimal process rework.

Voxel is not organized around selling a process or executing to a fixed print, but to work **alongside** engineering teams as manufacturing constraints are discovered, challenged and rewritten via continued, applied R&D. We engage early-on when materials, internal features, or surface requirements are still fluid, creating unique **partnerships** from qualification to production and beyond.

At our core is Voxel's proprietary application of PECM: continuously advanced through applied R&D and feedback. By vertically integrating electrolyte chemistry, cathode design, tooling and process control, we enable unique **internal geometry machining, superfinished surfaces and material machining** methodology.

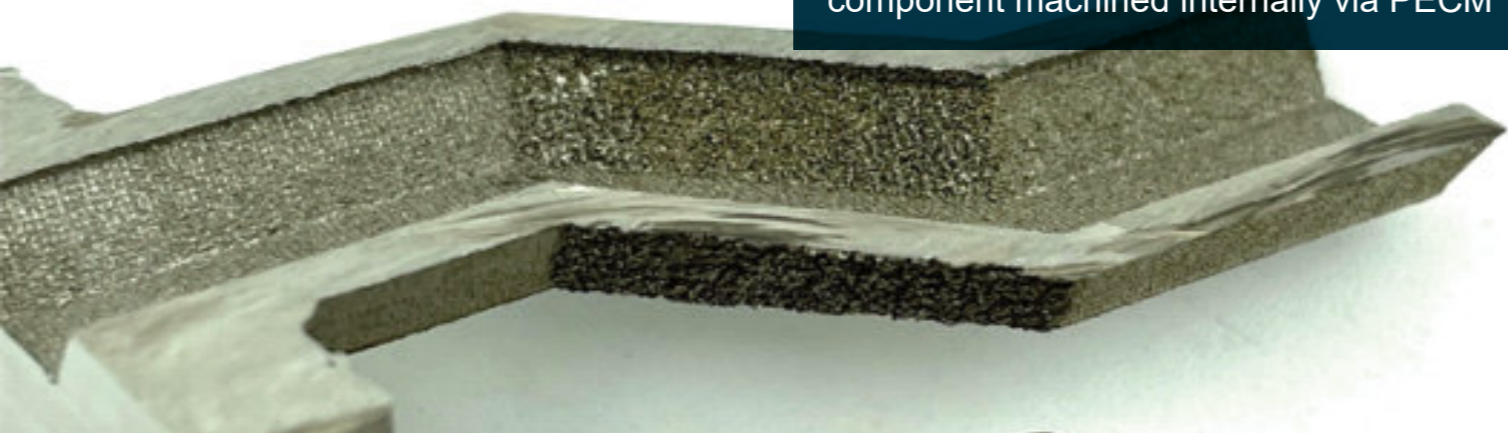



## Contact our Team


### WHY VOXEL?


Voxel integrates our **PECM technology** with **unique process expertise** to enable **repeatable, production-rate manufacturing** of complex metal parts for critical industries.

### WHY NOW?

Engaging with Voxel early creates **leverage**: our applied R&D and production teams can influence geometries, surfaces, and material strategies, ultimately enabling **higher-performance parts, smoother qualification** and a more **direct path to production**.

### GET IN TOUCH WITH OUR ENGINEERS:

 520 Hinton Pond Road STE 128  
Knightdale, NC 27545

 984-464-0701

 [info@voxelinnovations.com](mailto:info@voxelinnovations.com)

 [www.voxelinnovations.com](http://www.voxelinnovations.com)



## Sources & Citations

[1] [2] [3] Fly Net Zero – Aviation's Commitment to Net-Zero Carbon by 2050 | IATA

[<https://www.iata.org/en/programs/sustainability/flynetzero/>](<https://www.iata.org/en/programs/sustainability/flynetzero/>)

[4] [5] Thermodynamic limits and efficiency trends in modern gas turbine engines | Energies (MDPI)

[<https://www.mdpi.com/1996-1073/15/14/4946>](<https://www.mdpi.com/1996-1073/15/14/4946>)

[6] [7] Gas turbine performance improvements through higher turbine inlet temperatures | Energies (MDPI)

[<https://www.mdpi.com/1996-1073/18/13/3296>](<https://www.mdpi.com/1996-1073/18/13/3296>)

[8] Advanced turbine cooling concepts and internal passage design | NASA Technology Portfolio

[<https://technology.nasa.gov/patent/LEW-TOPS-52>](<https://technology.nasa.gov/patent/LEW-TOPS-52>)

[9] [10] Film cooling effectiveness and sensitivity to hole geometry and surface condition | International Journal of Thermal Sciences

[<https://www.sciencedirect.com/science/article/pii/S1290072918302965>](<https://www.sciencedirect.com/science/article/pii/S1290072918302965>)

[11] [12] Internal cooling channel roughness effects on heat transfer and pressure loss | Applied Thermal Engineering

[<https://www.sciencedirect.com/science/article/pii/S001793102300604X>](<https://www.sciencedirect.com/science/article/pii/S001793102300604X>)

[13] [14] Nickel-based superalloys for modern turbine applications | ONERA AerospaceLab

[[https://aerospacelab.onera.fr/sites/default/files/2024-01/AL3-02\\_0.pdf](https://aerospacelab.onera.fr/sites/default/files/2024-01/AL3-02_0.pdf)]([https://aerospacelab.onera.fr/sites/default/files/2024-01/AL3-02\\_0.pdf](https://aerospacelab.onera.fr/sites/default/files/2024-01/AL3-02_0.pdf))

[15] [16] GE9X engine certification and deployment of ceramic matrix composites | GE Aerospace

[<https://www.ge.com/news/press-releases/ge9x-engine-achieves-faa-certification>](<https://www.ge.com/news/press-releases/ge9x-engine-achieves-faa-certification>)

[17] [18] Cooling air usage, efficiency penalties, and turbine durability tradeoffs | Progress in Aerospace Sciences

[<https://www.sciencedirect.com/science/article/pii/S0376042122000834>](<https://www.sciencedirect.com/science/article/pii/S0376042122000834>)

[19] [20] Manufacturing constraints in turbine blade internal cooling geometries | Journal of Manufacturing Processes

[<https://www.sciencedirect.com/science/article/pii/S1526612522007486>](<https://www.sciencedirect.com/science/article/pii/S1526612522007486>)

[21] Additive manufacturing challenges for turbine cooling passages and surface quality | Additive Manufacturing

[<https://www.sciencedirect.com/science/article/pii/S2214860422003657>](<https://www.sciencedirect.com/science/article/pii/S2214860422003657>)

[22] [23] Heat exchanger miniaturization and internal surface sensitivity in aerospace thermal systems | Applied Thermal Engineering

[<https://www.sciencedirect.com/science/article/pii/S1359431123001946>](<https://www.sciencedirect.com/science/article/pii/S1359431123001946>)